



**RPL55**  
Radar level transmitter

Continuous level measurement without contact for liquids, pastes and slurries

Range 10 m

Process pressure 3 bar

2 /4 wires technology

Pulse Radar at 26 GHz (K-band)

ATEX

RPL55 is a radar sensor for continuous measurement on liquids, even chemically aggressive, in the presence of not particularly heavy process conditions. Suitable for level measurement in tanks with 1½ “G threaded connections. The small antenna allows the installation in calm pipes or in small tanks, moreover the availability of different measures of the antenna extension allow installation in the presence of insulation or other thicknesses to overcome.

**Technical Feature**

**Frequency**

K group (26GHz)

**Housing / Antenna material**

aluminum; PVDF

**Mechanical installation**

threaded G 1½

**IP rating**

IP67/IP68 (Sensor)

**Electrical connection**

Terminals

**Working temperature**

Antenna PVDF -40 ÷ +130°C

**Pressure**

-1 ÷ 3 bar

**Power supply**

24Vdc; 230Vac

**Certification**

ATEX

**Analog output**

4÷20mA

**Digital communication**

HART / MODBUS

**Measure range**

10 mt

**Accuracy**

±10mm

**Resolution**

1mm.

**Calibraton**


4 buttons or via HART / MODBUS

**Warm up**

5 minutes

**Display**

Plug-in display/keyboard 4 buttons matrix LCD

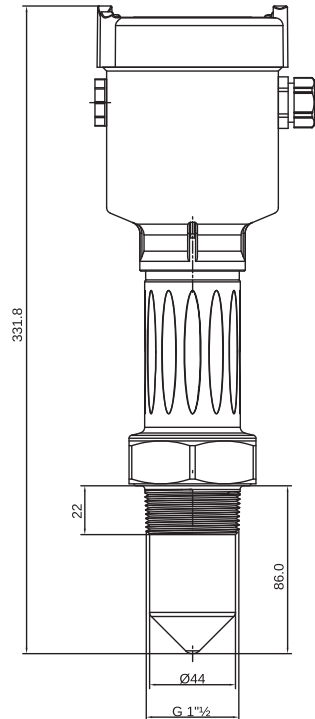

**RPL55** Radar level transmitter  
 Micro-waves pulse 26GHz group K  
 For liquids measurement also with strong erosive products  
 Max distance: 10m  
 Accuracy: ±5mm  
 Process pressure: -1+3bar

Version	
<b>I</b>	ATEX II 1 G/D Ex ia IIC T6...3 Ga / Ex ia IIIC T76°C...T146°C Da - only with G housing and B electronic
<b>P</b>	Standard
Antenna shape / Material / Process temperature	
<b>B</b>	Mono-pole / PVDF / -40° ÷ +130°C
Process connection / Material	
<b>GP</b>	Thread G 1"½ / PVDF
<b>ZZ</b>	Special
Non sensitive part (for nozzle mounting)	
<b>A</b>	100 mm
<b>B</b>	200 mm
Electronic preamplifier	
<b>A</b>	None
<b>B</b>	4÷20mA HART (2-wire); 24Vdc - compulsory for ATEX version
<b>C</b>	4÷20mA HART (4-wire); 24Vdc
<b>D</b>	4÷20mA HART (4-wire); 230Vac
<b>R</b>	10÷30Vdc MODBUS RTU
Housing / Housing protection / Antenna protection	
<b>D</b>	Aluminum 2 chambers (for 4-wire versions) / IP67 / IP68
<b>G</b>	SS316L / IP67 / IP68 - compulsory for ATEX version
<b>U</b>	Aluminum with transparent cap / IP67 / IP68
<b>Z</b>	Special
Cable entry	
<b>M</b>	M20x1,5
Keyboard/display programming module VL602	
<b>A</b>	Yes
<b>X</b>	No